

CIRCUIT-BREAKER, 14...20 A, N-RELEASE 260 A, SIZE S0, MOTOR PROTECTION, CLASS 10, SCREW CONNECTION STANDARD BREAKING CAPACITY,



Figure similar

| | |
|-----------------------|----------------------|
| product brand name | SIRIUS |
| Product designation | circuit breaker |
| Design of the product | for motor protection |

General technical data:

| | |
|---|---------|
| Product expansion | |
| • Auxiliary switch | Yes |
| Active power loss total typical | 8 W |
| Surge voltage resistance Rated value | 6 000 V |
| Protection class IP | |
| • on the front | IP20 |
| Mechanical service life (switching cycles) | |
| • of the main contacts typical | 100 000 |

Ambient conditions:

| | |
|--|----------------|
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |

- during transport

-50 ... +80 °C

Main circuit:

| | |
|--|-------------|
| Adjustable response value current of the current-dependent overload release | 14 ... 20 A |
| Operating voltage | |
| • Rated value | 690 V |
| • at AC-3 Rated value maximum | 690 V |
| Operating current | |
| • at AC-3 | |
| — at 400 V Rated value | 20 A |
| Operating power | |
| • at AC-3 | |
| — at 400 V Rated value | 7.5 kW |
| Operating frequency | |
| • at AC-3 maximum | 15 1/h |

Auxiliary circuit:

| | |
|------------------------------|---|
| Number of CO contacts | |
| • for auxiliary contacts | 0 |

Short-circuit:

| | |
|--|----------------|
| Design of the overcurrent release and short-circuit release | thermomagnetic |
|--|----------------|

Installation/ mounting/ dimensions:

| | |
|------------------------------|--|
| mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022 |
| Height | 97 mm |
| Width | 45 mm |
| Depth | 96 mm |
| Required spacing | |
| • with side-by-side mounting | |
| — Backwards | 0 mm |
| — at the side | 0 mm |

Certificates/ approvals:

| General Product Approval | For use in hazardous locations | Declaration of Conformity | Test Certificates |
|--------------------------|--------------------------------|---------------------------|-------------------|
|--------------------------|--------------------------------|---------------------------|-------------------|



[spezielle Prüfbescheinigung](#)
n

Shipping Approval



other

[sonstig](#)

[Umweltbestätigung](#)

[Bestätigungen](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RV10214BA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV10214BA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RV10214BA10&lang=en

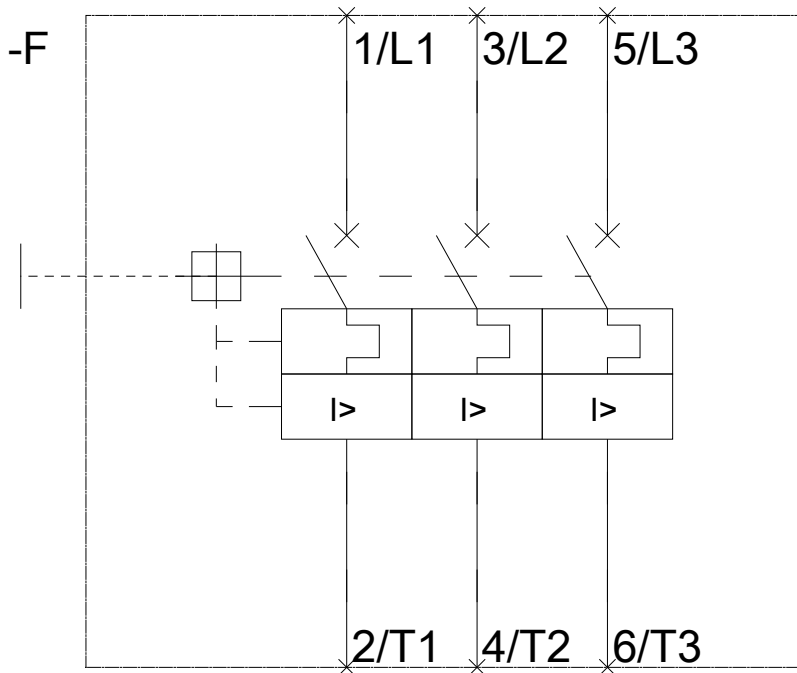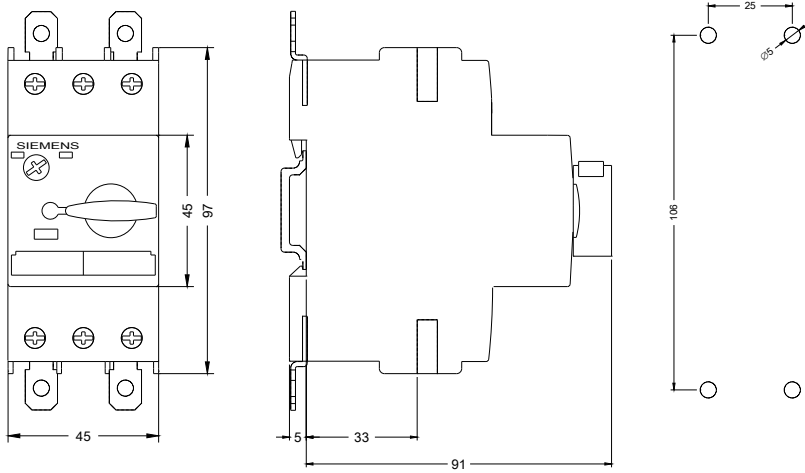

last modified:

31.07.2015