

## couplers – fabricated fittings

### FASLOCK AUTO

#### ■ FASLOCK AUTO – couplers



FASLOCK AUTO is used to form radius bends

- For 100 mm and 200 mm wide steel wire cable tray use FASLOCK AUTO S (small)
- For 300 mm wide to 600 mm wide tray use FASLOCK AUTO XL (large)

Supplied in packs of 25. No additional fasteners or tools required


For detailed installation instructions see p.113-115

#### ■ Installation

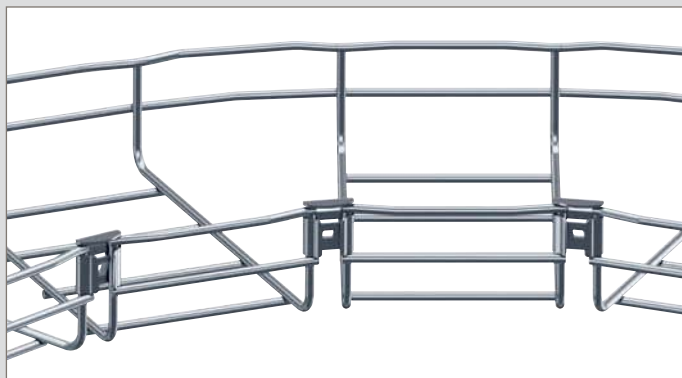

FASLOCK AUTO is positioned on the internal angle of a radius bend after steel wire cable tray has been cut  
No fasteners required

#### ■ Assembly



Clip FASLOCK AUTO into place  
Safety edges protect both the cables and the installer



Patented



Fast assembling



Fixing without nuts and bolts

→ Creating a radius bend : see p. 114-117

→ Installing FASLOCK AUTO : see p. 113-115

#### ■ Dimensions and weights

↕ 30 / 54 / 105 mm ↻ 100 → 600 mm



	Weight (kg)			
	EZ	ZN+	DC	316L
FASLOCK AUTO S	0-01	0-01	0-01	0-01
FASLOCK AUTO XL	0-01	0-01	0-01	0-01

Please use Cat. No. when placing your order, see p. 21

All weights are given in Kilograms (kg)

<b>Key:</b> EZ	Electrogalvanised after manufacture	DC	Zinc rich coating
ZN+	Zinc nickel plus additional coating (black)	316L	Stainless steel 316 L

For detailed information related to finishes, refer to p. 132-133

All dimensions (mm) are nominal