


## CSE Series... Control and signalling station

### EXPLODED VIEW

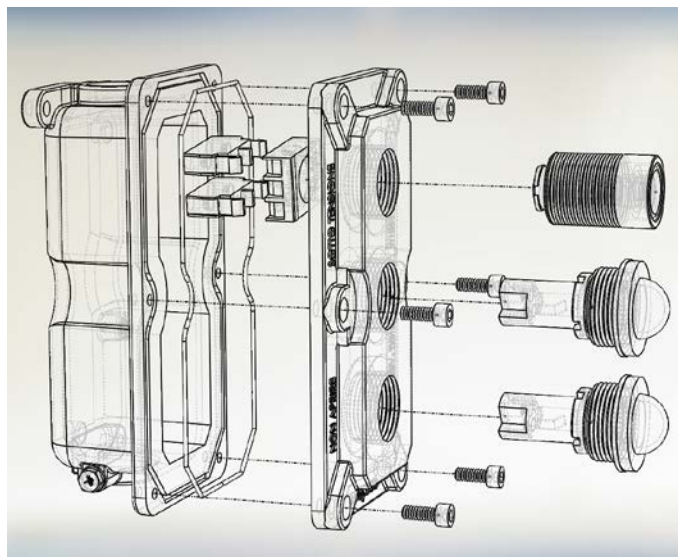

### MECHANICAL FEATURES OF ENCLOSURES

<b>Body and lid:</b>	Low copper content aluminium alloy, complete with wall fastening lugs.
<b>Gaskets:</b>	Acid, hydrocarbon and high temperature resistant silicon positioned between the body and the cover
<b>Certification label:</b>	Adhesive affixed to external surface
<b>Screws:</b>	Stainless steel
<b>Earth screw:</b>	Internal and external stainless steel
<b>Coating:</b>	Polyester RAL 7035 (Light grey)
<b>Threaded entries:</b>	One upper and one lower $\varnothing$ 3/4"
<b>Resistenza alla corrosione:</b>	The STANDARD of the aluminium alloy used by Cortem has passed the tests required by standards EN60068-2-30 (hot-humid cycles) and EN60068-2-11 (salt fog test)

### MECHANICAL FEATURES OF CONTROL AND SIGNALLING DEVICES

<b>Pushbutton:</b>	Coloured nylon
<b>Illuminated pushbutton:</b>	Clear coloured polycarbonate
<b>Outer body:</b>	Aluminium
<b>Internal bushing and pin:</b>	Stainless steel
<b>Gaskets:</b>	Acid and hydrocarbon resistant NBR
<b>Station assembly:</b>	Screwed onto cover
<b>Contact assembly:</b>	snap action on a dedicated flange to ensure the quick connection of entire contacts block to the station
<b>External body lens:</b>	Impact and UV resistant polycarbonate lens, coloured or transparent

### ELECTRICAL FEATURES





<b>Contacts for pushbuttons:</b>	Max. 25A 600 V
<b>Indicator lights:</b>	24/250V, 3W

### ACCESSORIES UPON REQUEST / SPECIAL REQUESTS

RAL 2004 (Pure orange) internal anti-condensation coating  
External polyester coatings in various colours (specify RAL colour)  
Cablegland / fittings

# CSE Series... Control and signalling station

## SELECTION TABLE

Illustration	Entry ØD	Description	Diagram	Weight Kg	Codes
	3/4" IS07/1 3/4" NPT	Pushbutton unit and indicator light		1.09	CSE-PL CSE-PLN
	3/4" IS07/1 3/4" NPT	Pushbutton unit plus two indicator lights		1.50	CSE-PLL CSE-PLLN
	3/4" IS07/1 3/4" NPT	Unit with two pushbuttons plus indicator light		1.60	CSE-PPL CSE-PPLN
	3/4" IS07/1 3/4" NPT	Break glass emergency pushbutton		1.50	CSEPEA-2 CSEPEA-2N
	3/4" IS07/1 3/4" NPT	Break glass emergency pushbutton with hammer		1.55	CSEPEA-2M CSEPEA-2MN
	3/4" IS07/1 3/4" NPT	Emergency mushroom head pushbutton		1.00	CSEPEP-2 CSEPEP-2N

Note:  
For non-standard arrangements, contact the Sales Office.