

# Product data sheet

Specifications



## industrial timing relay - 0.3..30 s - type A - 24 V AC/DC, 110..240 V AC - 1 C/O

RE8TA31BUTQ

! Discontinued on: 29 January 2021

! Discontinued

### Main

Range of product	Zelio Time
Product or component type	Optimum industrial timing relay
Component name	RE8
Time delay type	A
Time delay range	0.3...30 s
Sale per indivisible quantity	10

### Complementary

Discrete output type	Relay
Contacts material	90/10 silver nickel contacts
Width pitch dimension	22.5 mm
[Us] rated supply voltage	110...240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz
Voltage range	0.9...1.1 Us
Connections - terminals	Screw terminals, 2 x 1.5 mm <sup>2</sup> flexible with cable end Screw terminals, 2 x 2.5 mm <sup>2</sup> flexible without cable end
Tightening torque	0.6...1.1 N.m
Setting accuracy of time delay	+/- 20 % of full scale
Repeat accuracy	< 1 %
Voltage drift	< 2.5 %/V
Temperature drift	< 0.2 %/°C
Minimum pulse duration	26 ms
Reset time	50 ms
Maximum switching voltage	250 V
Mechanical durability	20000000 cycles
[Ith] conventional free air thermal current	8 A
Maximum [Ie] rated operational current	2 A DC-13 24 V at 70 °C conforming to IEC 60947-5-1/1991 2 A DC-13 24 V at 70 °C conforming to VDE 0660 3 A AC-15 24 V at 70 °C conforming to IEC 60947-5-1/1991 3 A AC-15 24 V at 70 °C conforming to VDE 0660 0.1 A DC-13 250 V at 70 °C conforming to IEC 60947-5-1/1991 0.1 A DC-13 250 V at 70 °C conforming to VDE 0660

0.2 A DC-13 115 V at 70 °C conforming to IEC 60947-5-1/1991  
0.2 A DC-13 115 V at 70 °C conforming to VDE 0660

<b>Minimum switching capacity</b>	at 12 V 10 mA
<b>Marking</b>	CE
<b>Overvoltage category</b>	III conforming to IEC 60664-1
<b>[Ui] rated insulation voltage</b>	250 V conforming to IEC 300 V conforming to CSA
<b>Supply disconnection value</b>	> 0.1 U <sub>c</sub>
<b>Operating position</b>	Any position without derating
<b>Surge withstand</b>	2 kV conforming to IEC 61000-4-5 level 3
<b>Power consumption in VA</b>	0.7 VA at 24 V 1.8 VA at 110 V 8.5 VA at 240 V
<b>Maximum power consumption in W</b>	0.5 W at 24 V
<b>Terminal description</b>	(A1-B1)CO ALT (15-16-18)OC_OFF
<b>Height</b>	78 mm
<b>Width</b>	22.5 mm
<b>Depth</b>	80 mm
<b>Net weight</b>	0.11 kg

## Environment


<b>Immunity to microbreaks</b>	3 ms
<b>Standards</b>	EN/IEC 61812-1
<b>Product certifications</b>	GL CSA UL
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Ambient air temperature for operation</b>	-20...60 °C
<b>Relative humidity</b>	15...85 % 3K3 conforming to IEC 60721-3-3
<b>Vibration resistance</b>	0.35 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
<b>IP degree of protection</b>	IP20 (terminals) IP50 (casing)
<b>Pollution degree</b>	3 conforming to IEC 60664-1
<b>Dielectric test voltage</b>	2.5 kV
<b>Non-dissipating shock wave</b>	4.8 kV
<b>Resistance to electromagnetic fields</b>	10 V/m conforming to IEC 61000-4-3 level 3
<b>Resistance to fast transients</b>	2 kV conforming to IEC 61000-4-4 level 3
<b>Disturbance radiated/ conducted</b>	CISPR 22 - class A CISPR 11 group 1 - class A

## Contractual warranty


<b>Warranty</b>	18 months
-----------------	-----------

Width 22.5 mm

Rail Mounting

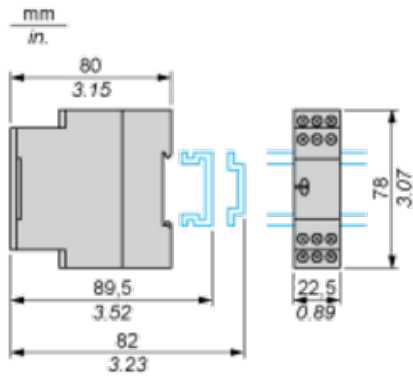


Screw Fixing

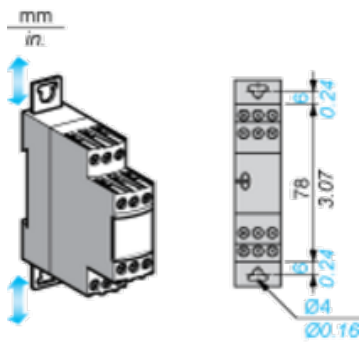


**Internal Wiring Diagram**

---



Recommended Application Wiring Diagram


---



**Performance Curves**

**A.C. Load Curve 1**

Electrical durability of contacts on resistive loading millions of operating cycles

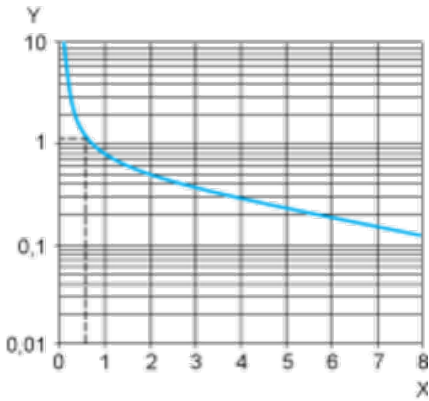


X Current broken in A

Y Millions of operating cycles

**A.C. Load Curve 2**


Reduction factor k for inductive loads (applies to values taken from durability curve 1).

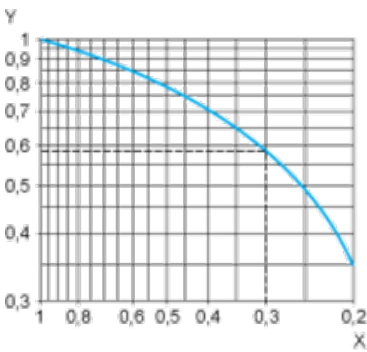


X Power factor on breaking ( $\cos \phi$ )

Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and  $\cos \phi = 0.3$ . For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For  $\cos \phi = 0.3$ :  $k = 0.6$  The electrical durability therefore becomes:  $1.5 \cdot 10^6$  operating cycles  $\times 0.6 = 900\,000$  operating cycles.



**D. C. Load Limit Curve**

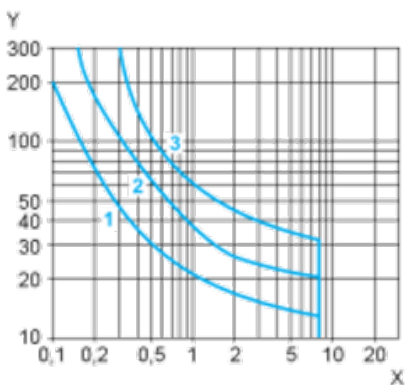

X Current in A

Y Voltage in V

1 L/R = 20 ms

2 L/R with load protection diode

3 Resistive load

**Function A : Power on Delay Relay**

---


**Description**

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

**Function: 1 Output**



**Function: 2 Outputs**

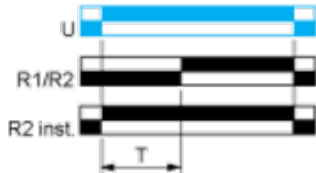

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)


**Legend**

- Relay de-energised
- Relay energised
- Output open
- Output closed

C	Control contact
G	Gate
R	Relay or solid state output
R1/R2	2 timed outputs
R2 inst.	The second output is instantaneous if the right position is selected
T	Timing period
Ta -	Adjustable On-delay
Tr -	Adjustable Off-delay
U	Supply

**Recommended replacement(s)**

RE8TA31BUTQ is replaced by the following product range:



**Harmony Timer Relays**

Near Field Communication and conventional Timer Relays (formerly known as Zelio Timer Relays)

Products: 83