

# Product data sheet

Specifications



## Harmony, Socket, for RXM2/RXM4 relays, screw connectors, mixed contact

RXZE2M114M

Product availability : Stock - Normally stocked in distribution facility

**Price\* : 6.10 USD**

### Main

Range of Product	Harmony Electromechanical Relays Harmony Timer Relays
Product or Component Type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay RXM 4 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

### Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm <sup>2</sup> AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm <sup>2</sup> AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm <sup>2</sup> AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm <sup>2</sup> AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m M3
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.06 in (27 mm)
Net Weight	0.12 lb(US) (0.056 kg)

### Environment

[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Standards	IEC 61984
Product Certifications	UL CSA Lloyd's

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	3000 V

## Ordering and shipping details

Category	21128-ZELIO ICE CUBE RELAY ACCESSORIES
Discount Schedule	CP2
GTIN	3389119404259
Nbr. of units in pkg.	1
Package weight(Lbs)	0.12 lb(US) (0.054 kg)
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.06 in (2.686 cm)
Package 1 width	1.67 in (4.245 cm)
Package 1 Length	3.12 in (7.918 cm)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	1.24 lb(US) (0.561 kg)
Package 2 Height	2.95 in (7.5 cm)
Package 2 width	3.46 in (8.8 cm)
Package 2 Length	5.51 in (14.0 cm)
Unit Type of Package 3	S02
Number of Units in Package 3	120
Package 3 Weight	16.05 lb(US) (7.281 kg)
Package 3 Height	5.91 in (15.0 cm)
Package 3 width	11.81 in (30.0 cm)
Package 3 Length	15.75 in (40.0 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes

---

<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

---


## **Contractual warranty**

---

<b>Warranty</b>	18 months
-----------------	-----------

---

Dimensions

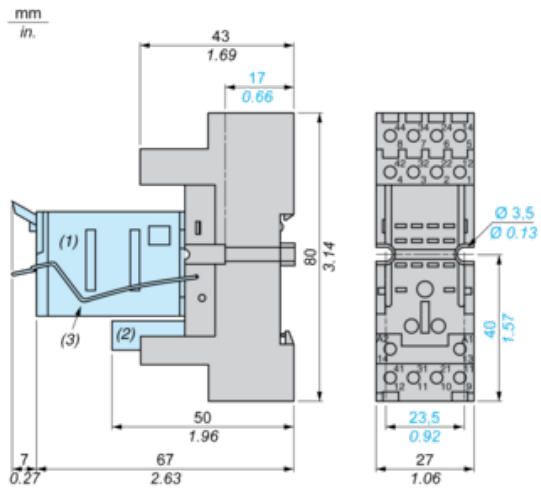

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes  $\text{Ø } 3.5 \text{ mm} \times 6.5 \text{ mm} / \text{Ø } 0.13 \text{ in.} \times 0.25 \text{ in.}$

Wiring Diagram

