


# Molded Case Circuit Breakers

## Spectra™ RMS

SE150 Frame  
 15-150A Circuit Breakers  
 Electronic Trip  
 Suitable for Reverse Feed  
 UL File E-11592, CSA LR 40350

### Product Number Structure

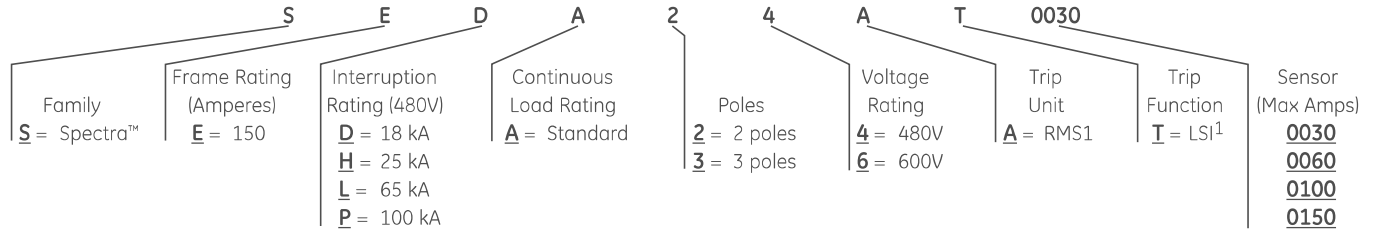

<sup>1</sup>Adjustable Instantaneous with Tracking Short Time (Long Time established via Interchangeable Rating Plugs).  
 Note: This information is provided for interpreting product numbers (it should not be used to build product numbers).

### SED, SEH, SEL, SEP<sup>2</sup>; 2-Pole, 150A, 480 Vac Max., (IEC 947-2: 160A, 415 Vac Max.)

Rating Plug			Frame				Terminal Lugs for Front Connection (Cu/Al)	
Adjustable Instantaneous Trip Range Amps			UL 489 IC @ 480 Vac				Product Number	Wire Range
Ampere Rating	Low	High	Product Number	Product Number	Product Number	Product Number		
15	43	182	SRPE30A15	30	SEDA24AT0030 <sup>3</sup>	SEHA24AT0030 <sup>3</sup>	SELA24AT0030 <sup>3</sup>	SEPA24AT0030 <sup>3</sup>
20	58	254	SRPE30A20					
25	73	332	SRPE30A25					
30	87	415	SRPE30A30					
35	104	453	SRPE60A35					
40	118	501	SRPE60A40	60	SEDA24AT0060 <sup>3</sup>	SEHA24AT0060 <sup>3</sup>	SELA24AT0060 <sup>3</sup>	SEPA24AT0060 <sup>3</sup>
45	134	583	SRPE60A45					
50	148	637	SRPE60A50					
60	178	777	SRPE60A60					
70	206	863	SRPE100A70					
80	236	999	SRPE100A80	100	SEDA24AT0100	SEHA24AT0100	SELA24AT0100	SEPA24AT0100
90	267	1138	SRPE100A90					
100	297	1280	SRPE100A100					
110	328	1426	SRPE150A110					
125	374	1640	SRPE150A125					
150	450	1991	SRPE150A150	150	SEDA24AT0150	SEHA24AT0150	SELA24AT0150	SEPA24AT0150

### SED, SEH, SEL, SEP<sup>2</sup>; 3-Pole, UL/CSA: 150A, 600 Vac Max., (IEC 947-2: 160A, 690 Vac Max.)

Rating Plug			Frame				Terminal Lugs for Front Connection (Cu/Al)	
Adjustable Instantaneous Trip Range Amps			UL 489 IC @ 480 Vac				Product Number	Wire Range
Ampere Rating	Low	High	Product Number	Product Number	Product Number	Product Number		
15	43	182	SRPE30A15	30	SEDA36AT0030 <sup>3</sup>	SEHA36AT0030 <sup>3</sup>	SELA36AT0030 <sup>3</sup>	SEPA36AT0030 <sup>3</sup>
20	58	254	SRPE30A20					
25	73	332	SRPE30A25					
30	87	415	SRPE30A30					
35	104	453	SRPE60A35					
40	118	501	SRPE60A40	60	SEDA36AT0060 <sup>3</sup>	SEHA36AT0060 <sup>3</sup>	SELA36AT0060 <sup>3</sup>	SEPA36AT0060 <sup>3</sup>
45	134	583	SRPE60A45					
50	148	637	SRPE60A50					
60	178	777	SRPE60A60					
70	206	863	SRPE100A70					
80	236	999	SRPE100A80	100	SEDA36AT0100	SEHA36AT0100	SELA36AT0100	SEPA36AT0100
90	267	1138	SRPE100A90					
100	297	1280	SRPE100A100					
110	328	1426	SRPE150A110					
125	374	1640	SRPE150A125					
150	450	1991	SRPE150A150	150	SEDA36AT0150	SEHA36AT0150	SELA36AT0150	SEPA36AT0150

<sup>2</sup>SEL, SEP UL current limiting.

<sup>3</sup>When used with 15-50A Rating Plug, UL listed for HID (high intensity discharge).

Note: All Spectra™ breakers UL listed as HACR type.  
 All Spectra™ breakers marked CE.

